


AQUATOUGH 190

The AquaTouch pads are easy to install and remain in a stable vertical position against the pool wall despite turbulent pool water conditions. The non-slip and non-abrasive surface of the AquaTouch pads lends ease and comfort to competitors' impacts and ensure reliability.

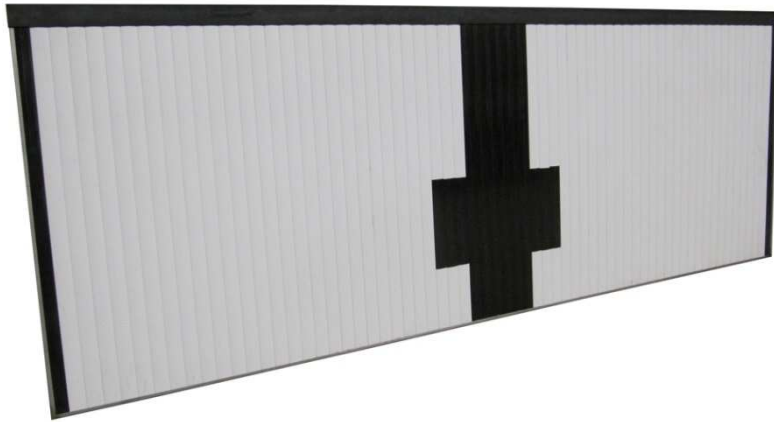

Non binding picture

Composition

- 1 touch pad
- 1 connection cable
- 1 pair of installation stainless steel brackets per touchpad
- 1 Installation instruction

Technical description

- Use :** Indoor or outdoor
- Dimensions :** 1945 x 905 x 10 mm
- Material :** PVC lamellas (front side, non-slip surface), stainless steel 316L (back side), 4 linear sensors, rubber edge
- Weight :** 24 kg
- Transmission cabling :** 2,8 m between the touch pad and the electronic interface
- Connection :** banana plugs, to be connected with the Aquaconnect system – Dry contact

Functions

The touch pad registers the swimmer impacts at each curve. The information is relayed to the junction box and then to the electronic interface.

Requirements

To equip a pool of 25 or 50 m (1 or 2 touch pads), the pool length must be at least 25.01 m (for the 25 m pool), and 50.02 m (for the 50 m pool).

Options

Trolley for easy and vertical storage

